HS-150IT Premium Intrinsically Safe Accelerometer

AC acceleration and temperature output via 3 Pin MS Connector

Key Features

- Temperature output
- Intrinsically Safe with European, USA, Indian and Australian approvals
- For use with data collector

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

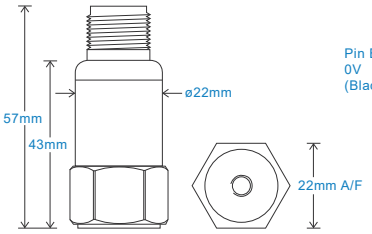



Technical Performance

Mounted Base Resonance	see 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table ±10%
	Nominal 80Hz at 22°C
Frequency Response	2Hz (120cpm) to 10kHz (600kcpm) ± 5%
	1.5Hz (90cpm) to 12kHz (720kcpm) ± 10%
	0.8Hz (48cpm) to 15kHz (900kcpm) ± 3dB
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature	10 mV/ºC standard 100°C - Option 130°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA005 - non-booted
	HS-AA068 or HS-0069 - booted
Mounting Threads	see: 'How To Order' table

Electrical

Excitation Voltage:	18-30Volts DC
Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	>10^8 Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

Typical Frequency Response (at 100mV/g)

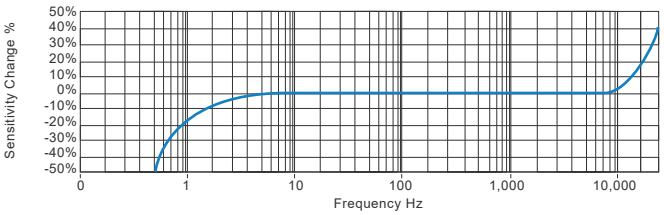

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications

710318

This product is certified in accordance with
UL 60079-0, 6th Ed, Rev. July 26, 2013
UL 60079-11, 6th Ed. Rev. September 6, 2013
CAN/CSA C22.2 No. 60079-0:15 Rev. October 2015
CAN/CSA C22.2 No. 60079-11:14
UL 913, 8th Ed. Rev. October 16, 2015

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

HS-150IT Premium Intrinsically Safe Accelerometer

AC acceleration and temperature output via 3 Pin MS Connector

Intrinsically Safe Requirements

Maximum Cable Length	See website www.hansfordsensors.com
Certificate details: Group I	IECEx 18.0082X Baseefa18ATEX0130X Ⓔx I M 1 Ex ia I Ma
Certificate details: Group II and III	IECEx 18.0082X Baseefa18ATEX0130X Ⓔx II 1GD Ex ia IIC T6..T4 Ga Ex ia IIIC T135ºC Da Ex ia IIIB T110ºC..T145ºC Da
Terminal Parameters Connector	Ui = 28V, Ii = 93mA, Pi = 0.65W Ci = 1.2nF Li= 0
500V Isolation	Units Will Pass A 500V Isolation Test
Standards Applied to Product	EN IEC 60079-0:2018 EN 60079-11:2012 IEC 60079-0 Edition 7 2017 IEC 60079-11 Edition 6 2011
Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR4-Ex1.26 (BAS02ATEX7206) 1 x MTL Zener Barrier MTL7728+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z728 (BAS01ATEX7005) or any other barrier that conforms with the terminal parameters
Temperature	1 x Pepperl + Fuchs Galvanic Isolator KFD2-VR-Ex1.18 (BAS01ATEX7262) 1 x MTL Zener Barrier MTL7764+ac(BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z764 (BAS01ATEX7005) or any other barrier that conforms with the terminal parameters

Certified Temperature Range	Ex ia IIC T6 Ga (-55°C ≤ Ta ≤ +57°C) (Gas) Ex ia IIC T4 Ga (-55°C ≤ Ta ≤ +103°C) (Gas) Ex ia IIIB T110°C Da (-55°C ≤ Ta ≤ +57°C) (Dust) Ex ia IIIB T145°C Da (-55°C ≤ Ta ≤ +92°C) (Dust) Ex ia IIIC T135°C Da (-55°C ≤ Ta ≤ +70°C) (Dust) Ex ia I Ma (-55°C ≤ Ta ≤ +103°C) (Mining)
Australian Approval Group I	IECEx ExTC 18.0032X Ex ia I Ma (-55ºC< Ta<+104ºC)
US/Canada Approvals	Certificate No. SGSNA/19/BAS/00005 Cl I, II, III, Div 1, 2 Gr A-G T* Cl I Zn 0 AEx ia IIC T6...T4 Ga Cl II Zn 20 AEx ia IIIC T135ºC Da Ex ia IIC T6...T4 Ga Ex ia IIIC T135ºC Da Or Cl I, II, III, Div 1, 2 Gr A-D G and F T* Cl I Zn 0 AEx ia IIC T6...T4 Ga Cl II Zn 20 AEx ia IIIB T110°C...T145°C Da Ex ia IIC T6...T4 Ga Ex ia IIIC T110ºC...T145ºC Da
Control Drawing	M06-083-A Overbraided Cable M06-084-A PUR Cable M06-085-A Silicone Cable M06-086-A FR PUR Cable M06-087-A Various Cables (HS-150IT Only)

Special conditions of use: When a sensor is supplied with integral cable, this must be terminated in an enclosure providing at least degree of protection IP20.
Note: If the equipment is to be used in unusual environments or aggressive substances are likely to be encountered, contact the manufacturer to discuss suitability.

How To Order

Product Prefix
HS - Hansford Sensors

Product Series
150IT - Premium Intrinsically Safe Accelerometer

H	S	1	5	0	I	T	X	X	X	X	X	X	X

Extra Options (if required)
A - Australia (Group I)
I - Intrinsically Safe (Group II)
L - 316L Stainless Steel
M - Mining (Group I)
S - 90° Side Exit
T - Temperature Output
Y - 5% tolerance on sensitivity

Sensitivity	Range	Resonant Frequency
010 - 10mV/g	±800g	34kHz (2,040kcpm)
030 - 30mV/g	±250g	33kHz (1,980kcpm)
050 - 50mV/g	±160g	32kHz (1,920kcpm)
100 - 100mV/g	±80g	30kHz (1,800kcpm)
250 - 250mV/g	±32g	28kHz (1,680kcpm)
500 - 500mV/g	±16g	26kHz (1,560kcpm)

Cable/Connector
01 - PUR
03 - Braided
07 - Silicon
52 - 3 Pin MS
54 - M12

Mounting Threads
01 - ¼-28" UNF Female
02 - ¼-28" UNF Male
05 - Quick Fit Female
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male
10 - M10 x 1.5mm Male

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice