

HS-AC Cables

Multi-core Cables



For use in fixed systems where multi-core cables are required to connect between junction boxes and monitoring systems.

Part No. Description

HS-AC062 2 Pair 22AWG Individual Screened PVC Cable

Overall Nominal Diameter: 0.2 in.
 Operating Temperature Range: -4°F to +176°F
 UL Temperature Rating: 60°C
 Bulk Cable Weight: 0.08 lbs/1000 ft
 Max. Recommended Pulling Tension: 42.0 lbs.

Min. Bend Radius/ Minor Axis: 1.8 in.
 Conductor: Tinned Copper (2 pairs, 7x30 stranding)
 Insulation Material: PP (polypropylene, wall thickness <0.01 in.)
 Max. Operating Voltage - UL: 300 V RMS
 Max. Recommended Current: 2.3 Amps per Conductor at 77°F

HS-AC286 6 Pair 22AWG Individual Screened PVC Cable

Overall Nominal Diameter: 0.03 in.
 Operating Temperature Range: -4°F to +176°F
 UL Temperature Rating: 80°C (UL AWM Style 2919)
 Bulk Cable Weight: 70.0 lbs/1000 ft.
 Max. Recommended Pulling Tension: 157.0 lbs.

Min. Bend Radius/ Minor Axis: 3.8 in.
 Conductor: Tinned Copper (6 pairs, 7x30 stranding, Dia. <0.01 in.)
 Insulation Material: PP (polypropylene, wall thickness <0.01 in.)
 Max. Operating Voltage - UL: 300 V RMS
 Max. Recommended Current: 2 Amps per Conductor at 77°F

HS-AC041 9 Pair 22AWG Individual Screened PVC Cable

Overall Nominal Diameter: 0.03 mm.
 Operating Temperature Range: -4°F to +176°F
 UL Temperature Rating: 80°C (UL AWM Style 2919)
 Bulk Cable Weight: 101.0 lbs/1000 ft.
 Max. Recommended Pulling Tension: 230.0 lbs.


Min. Bend Radius/ Minor Axis: 4.25 in.
 Conductor: Tinned Copper (9 pairs, 7x30 stranding, Dia. 0.3 in.)
 Insulation Material: PP (polypropylene, wall thickness <0.01 in.)
 Max. Operating Voltage - UL: 30 V RMS
 Max. Recommended Current: 1.4 Amps per Conductor at 77°F

HS-AC171 12 Pair 22 AWG Individual Screened PVC Cable

Overall Nominal Diameter: 0.5 In.
 Operating Temperature Range: -4°F to +176°F
 UL Temperature Rating: 80°C (UL AWM Style 2919)
 Bulk Cable Weight: 124 lbs/1000 ft.
 Max. Recommended Pulling Tension: 320 lbs.

Min. Bend Radius/ Minor Axis: 5 In.
 Conductor: Tinned Copper (12 pairs, 7x30 stranding, Dia. <0.01 in.)
 Insulation Material: PP (polypropylene, wall thickness <0.01 in.)
 Max. Operating Voltage - UL: 30 V RMS
 Max. Recommended Current: 1.4 Amps per Conductor at 77°F

How To Order

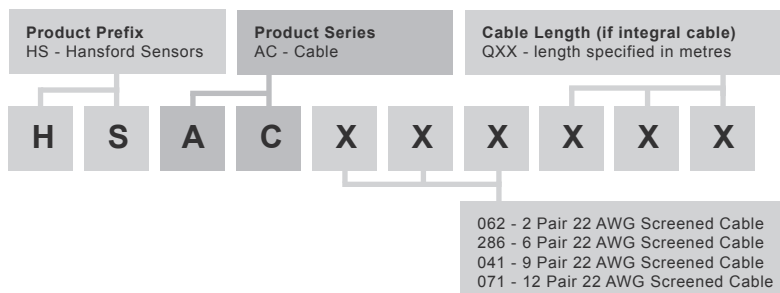

www.hansfordsensors.com
 sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
 TS595U.2

