HS-CE-SSM Connection Enclosure
Stainless Steel

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

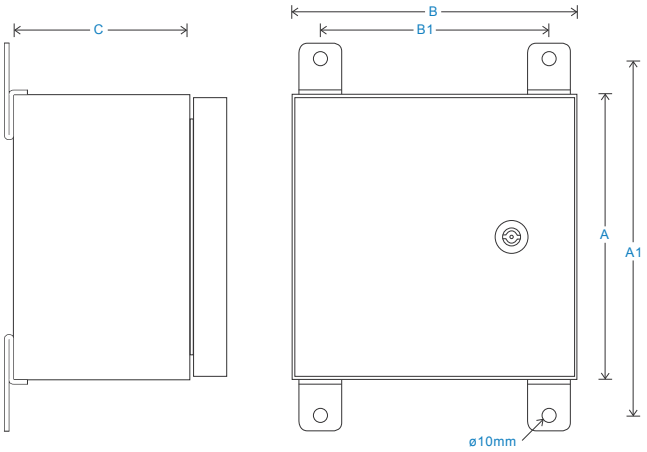

dimensions to be specified in 'how to order' table

Technical Performance

Inputs	Via accelerometer
Output	BNC as standard (TNC as alternative)
Mounting Board	PCB Panel
Material	304 Stainless Steel
Dimensions	see: 'How To Order' table
Sealing	IP66
Termination	Spring-loaded terminal (no screwdriver required)
Door	Lock and polyamide key
Glanding	Glands supplied but not fitted Holes are punched for: Single input M12 - ø3.5-7mm cable Single input M20 - ø7-13mm multi-core cable Multi input M20 - 3 x ø5.3mm
Labelling	Channel locations - other labelling available upon request
Mounting	supplied are 4 x Brackets
EMC	EN61326-1:2013

How To Order

Product Prefix
HS - Hansford Sensors

Options (if required)
C - Compact design

H	S	C	E	X	X	X	X	X	X	X	S	S	M

Product Series
CE - Connection Enclosure

Channels **Dimensions (in mm)**

	A	B	C	A1	B1
001-012	200	x 200	x 150	(250,	160)
009-024	200	x 300	x 150	(250,	210)

(others available on request)

Options (BNC as default)
TNC - Output: TNC Connector

SS - Material: Stainless Steel
M - PCB Board Connection

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice