HS-CEC-SSM Connection Enclosure
Stainless Steel

Key Features

- Compact design
- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

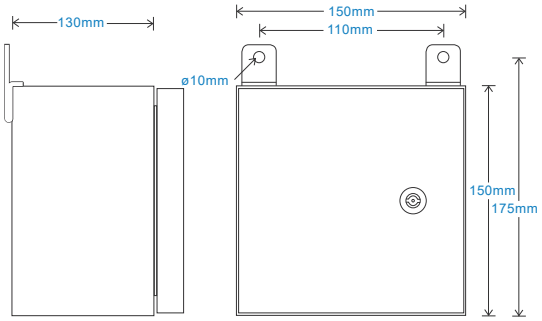

Technical Performance

Inputs	Via accelerometer	Door	Lock and polyamide key
Output	BNC as standard	Glanding	Glands supplied but not fitted
Mounting Board	PCB Panel		Holes are punched for:
	(customisable upon request)		Single input M12 - ø3.5-7mm cable
Material	304 Stainless Steel (to be specified		Single input M20 - ø7-13mm multi-core cable
	in options of 'How To Order' table)		Multi input M20 - 3 x ø5.3mm
Dimensions	see: diagram	Labelling	Channel locations - other
Termination	Spring-loaded terminal		labelling available upon request
	(no screwdriver required)	Mounting	supplied are 2 x Brackets
Sealing	IP66	EMC	EN61326-1:2013

How To Order

Product Prefix
HS - Hansford Sensors

Options
C - Compact design

H	S	C	E	C	X	X	X	S	S	M

Product Series
CE - Connection Enclosure

Channels
001-006

SS - Material: Stainless Steel
M - PCB Board Connection

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice