HS-CE-PCM Connection Enclosure

Polycarbonate

Key Features

- Provides a terminal to take readings from accelerometers via a portable data-collector
- Multiple outputs via multiple connectors

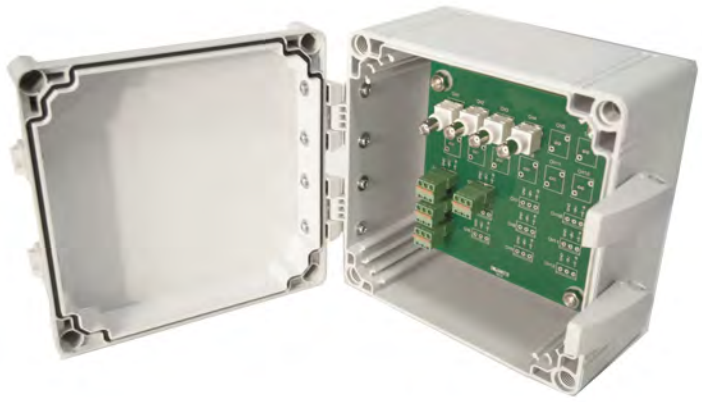

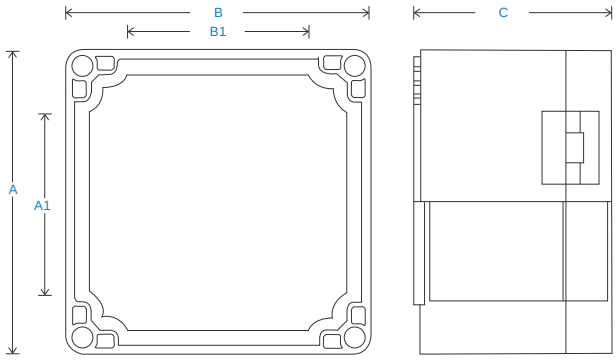

Technical Performance

Inputs	Via accelerometer
Output	BNC as standard (alternatives can be specified in 'How To Order' table)
Mounting Board	PCB Mounted
Material	Polycarbonate (to be specified in options of 'How To Order' table)
Dimensions	see: 'How To Order' table
Sealing	IP66
Termination	Spring loaded terminal
Door	Catches
Glanding	Glands supplied but not fitted Holes are punched for:
	Single input M12 - ø3.5-7mm cable
	Single input M20 - ø7-13mm multi-core cable
	Multi input M20 - 3 x ø5.3mm
Labelling	Channel locations - other labelling available upon request
Mounting	supplied are 4 x Brackets
EMC	EN61326-1:2013

How To Order

Product Prefix
HS - Hansford Sensors

PCM - Material : Polycarbonate

H	S	C	E	X	X	X	X	X	X	P	C	M

Product Series
CE - Connection Enclosure

Channels **Dimentions (in mm)**

	A	B	C	A1	B1
001-012	200 x	200 x	132	(120,	120)
013-024	200 x	300 x	132	(120,	220)

(others available on request)

Options (BNC as default)
TNC - Output: TNC Connector

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice