HS-422I/M Intrinsically Safe Accelerometer

4-20mA acceleration output via PUR Cable

Key Features

- Intrinsically Safe with European, USA, Australian and South African approvals
- For use with PLC/DCS systems
- Waterproof
- Resistant to oil

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

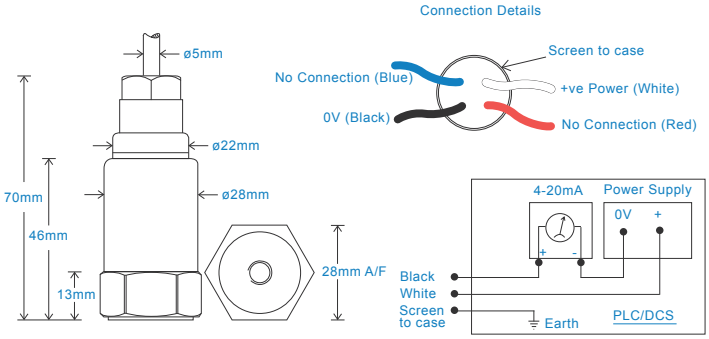

Technical Performance

Mounted Base Resonance	10kHz min
Acceleration Ranges	see: 'How To Order' table ±10%
	Nominal 80Hz at 22°C
Frequency Response	10Hz (600cpm) to 5kHz (300kcpm) ± 5%
	- ISO10816
Isolation	Base isolated
Range	see: 'How To Order' table
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8Nm
Weight	150gms (nominal)
Maximum Cable Length	1000 metres
Standard Cable Length	5 metres
Screened Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	100 metres max. (10 bar)

Electrical

Current Output	4-20mA DC proportional to acceleration
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	2 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	see: attached certification details
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

Typical Frequency Response

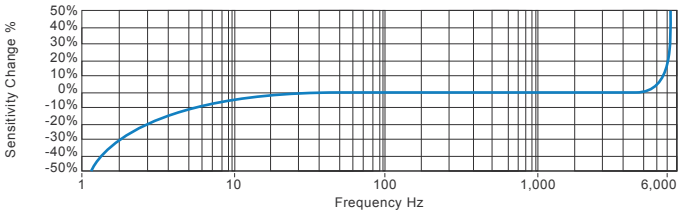

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Certifications

710318

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS435.6

HS-422I/M Intrinsically Safe Accelerometer

4-20mA acceleration output via PUR Cable

Intrinsically Safe Requirements

Maximum Cable Length	nominal 100 metres see attached system drawings
Certificate details: Group I + II	IECEx BAS08.0034X Baseefa08ATEX0086X Ⓔx II 1GD Ex ia IIC T6 Ga Ex ia IIIC T80°C IP65 Da Ⓔx I M1 Ex ia I Ma (-40ºC ≤ Ta ≤ +60ºC)
Accelerometer System Certificate	Baseefa08Y0087 Ex ia IIC T6 (-40°C ≤ Ta ≤ +60°C) *On request - consult Sales Office
Terminal Parameters	Ui = 28V, Ii = 115mA, Pi = 0.65W Group II Ui = 16.5V Pi = 0.65W or Ui = 28V Ii = 115mA Pi = 0.65W Group I
500V Isolation	Units Will Pass A 500V Isolation Test
Certified Temperature Range	Ex ia IIC T6 Ga (-40°C ≤ Ta ≤ +60°C) (Gas) Ex ia IIIC T80°C IP65 Da (-40°C ≤ Ta ≤ +60°C) (Dust) Ex ia I Ma (-40°C ≤ Ta ≤ +60°C) (Mining)
Australia Approval Group 1	IECEx ITA 10.0003X Ex ia I Ma (-40ºC ≤ Ta ≤ +60ºC)
South African Approval	Certificate No. MASC MS/16-0229X Group I and II (As Baseefa/ATEX)

US/Canada Approvals	Certificate No. USTC/15/FAI/01350 Class I, II, III, Division 1, 2, Groups A - G, T6, -40°C to +60°C, IP65 Class I, Zone 0, AEx, ia, IIC, T6, Ga, -40°C to +60°C Zone 20, AEx, ia, IIIC, T80°C, IP65, Da, -40°C to +60°C
Barrier	1 x Pepperl + Fuchs Galvanic Isolator KFD2-STC4-Ex1, which has superseded KFD2-CR-Ex1.30300 (BAS00ATEX7164) see attached system drawings 1 x MTL Zener Barrier MTL7787+ (BAS01ATEX7217) or Pepperl + Fuchs Zener Barrier Z787 (BAS01ATEX7005) or any other barrier that conforms to system drawings attached
System Connections for Zener Barrier	see attached system drawings
System Connections for Galvanic Isolator	see attached system drawings
Terminal Parameters	Ui = Vmax = 28V Ii = Imax = 115mA Pi = 0.65W
Notes:	Special conditions of safe use for Group II dust. The free end of the cable on the integral cable version of the apparatus must be terminated in an appropriately certified dust-proof enclosure. The unit has no serviceable parts.

How To Order

Product Prefix
HS - Hansford Sensors

Product Series
422 - Industrial Vibration Sensor

Cable Length (if integral cable)
QXX - length specified in metres

H	S	4	2	2	I	X	X	X	X	X	X	X	X	X	X

Extra Options (if required)

A - Australia (Group I)
F - Filtered
I - Intrinsically Safe (Group II)
L - 316L Stainless Steel
M - Mining (Group I)
T - Temperature Output

P - Peak Range
PP - Peak to Peak Range

Acceleration Range (RMS unless specified)
001 - 0-1g
002 - 0-2g
005 - 0-5g
010 - 0-10g
100 - 0-100g

Cable/Connector
01 - PUR*
02 - Braided
07 - Silicon
08 - Flame Retardant
50 - 2 Pin MS*
54 - M12
* Please note these connection options are NOT available in Australia

Mounting Threads
01 - ¼-28" UNF Female
02 - ¼-28" UNF Male
05 - Quick Fit Female
06 - M6 x 1mm Male
08 - M8 x 1.25mm Male
10 - M10 x 1.5mm Male

Hansford Sensors
Excellence in Vibration Monitoring

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice